
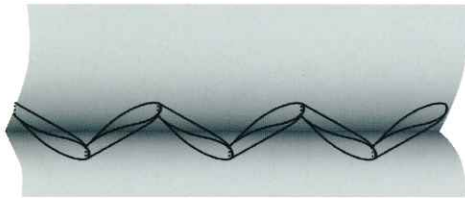


单线双撬暗缝机

Single thread bluff edge blindstitch machine

VEB 200-2

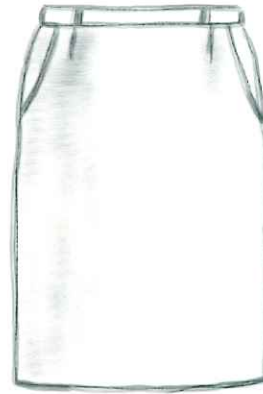

单线双布顶暗缝机

除具备有VEB 200-1的基本性能外，也适应中厚布料，由于配置双布顶结构，在缝制跨缝厚部时不过底不留印记。

VEB 200系列新功能：

- 在高速车缝下能保持精确的拼接车缝是您正在寻找的机器。
- 由于加长了缝臂，有效地跟踪缝迹，因此产量也提高。
- 机器易用性和可视性缝制区域再次得到改善。
- VEB模块化系统使机器的使用成本降低到最少。
- 标准的直驱马达，可选配剪线和数字式深度装置，完美的配套组合。

Single thread bluff edge blindstitch machine

The new VEB 200-2 double blind stitching machine. Specially designed for demanding fabrics from fine to medium quality.












The bluff edge blindstitch seam is hidden between the fabric layers as a loose cross stitch with alternating needle penetration between the hem's fabric layers. There are no marks over cross seams on either side of the garment due to two alternating spring-loaded plungers.

The new features of the VEB 200 series:

- The precise stitching even at high sewing speeds is what you are looking for.
- Due to the extended arm passage, the application of facing tacking is considerably facilitated and thus the productivity is also increased.
- The user friendliness and the view of the sewing area have been improved again.
- The VEB modular system with reduced maintenance intensity minimizes the operating costs of the machine!
- The standard Direct Drive motor, the optional thread trimmer and the optional digital stitch depth gauge complete (round off) the comfort package.

STROBEL



 60 sec	速度 / Speed 建议车缝速度 / Recommended rated speed	2600 min-1 1600 min-1
	针码长度 / stitch length	4,0 - 7,0 mm (按不同面料 / depend on fabric)
	上送料 / top feed	塔型齿 / pyramid toothing 锯形齿 (选购件) / saw toothing optional
	左弹簧布顶, 右弹簧布顶 / fixed plunger left, spring loaded plunger right	
	针板孔宽度 / needle plate opening	9,5 mm
	左右布顶深度调整 / stitch depth regulation right and left	
	左布顶深度调整 / stitch depth regulation left	数字式 / digital optional
	机针型号 / needle system 机针号数 / needle size	GROZ-BECKERT 1669 EEO 80
	缝臂 / support arm	直径 / diameter 55 mm
	开合操作台 / swing away workplate	
	剪线 / thread trimmer	选购件 / optional

机头手轮直径 / machine pulley diameter	dw 71 mm
马达马力 / min. motor power	550 W
V型皮带 / V-belt profile	10 x 6 mm
同步齿轮 / toothed belt pulley/machine	Z = 38
同步皮带 / toothed belt profile	HTD 5M-9
针步类型 / stitch type	单线暗缝线迹 105 / single thread chain stitch bluff edge blind stitch type 105
建议缝线 / thread	涤纶长丝包心线 / polyester continuous filament 200/2
空气气压 / pneumatic connection	6 bar
平均空气用量 / average air consumption	按装置需要 / depending on the equipment
需要空间 / required space	0,5 m x 1,1 m
缝速1800/分时工作噪音 / operating noise at 1800 min-1 nach DIN 45635-48-1 KL3	LpAm 70 dB(A)