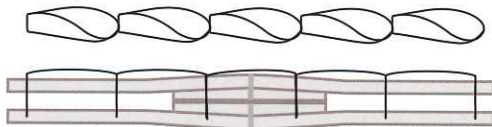


单线连接缝暗缝机

Single thread blindstitch attaching machine













单线连接缝暗缝机

高速耐用，多功能，非常适合车缝内衬，贴面或夹克的袋布和裤脚卷边，由于弹簧压脚关系在车缝厚的位置也有不会出现痕迹。（例如：连接缝）。

Single thread blindstitch attaching machine

Fast, durable and versatile and thus ideal for attaching linings, facings or pocket bags of coats and jackets or to hem trousers. Due to a spring-loaded presser foot the change of thickness (i.e. at cross seams) are sewn without marks.



 60 sec	速度 / Speed 机器最高缝速 / mechanically admissible 建议车缝速度 / Recommended rated speed	3500 min-1 3200 min-1
	针码长度 / stitch length	5,0 - 8,0 mm
	上送料 / top feed	塔型齿 / pyramid toothing 锯型齿 / saw toothing optional 涂层齿 / coated
	弹簧布顶 / spring loaded plunger	变形布顶, 选购装置 / plunger variation optional
	针板开口 / needle plate opening	6,0 mm 4,5 mm / 选配件 / optional 7,0 mm / 选配件 / optional 8,0 mm / 选配件 / optional
 digital	缝线深度调节 / stitch depth regulation	数字式, 选配件 / digital optional
	机针型号 / needle system 机针号数 / needle size	Strobel 1669, Strobel 4669 60 - 90
	缝臂 / support arm	直径 / diameter 60 mm
	开合式工作台 / swing away workplate	
	剪线装置 / thread trimmer	选配件 / optional

机头手轮直径 / machine pulley diameter	80 mm
电机功率 / min. motor power	400 W
V型皮带 / V-belt profile	10 x 6 mm
同步齿轮 / toothed belt pulley/machine	Z = 38
同步皮带 / toothed belt profile	HTD 5M-9
针步类型 / stitch type	103 / 单线链缝线步 / single thread chain stitch
建议缝线 / recommended thread	PES No 120 - 300
空气压力 / pneumatic connection	6 bar
平均空气用量 / average air consumption	95l/h
需要空间 / required space	0,5m x 1,1m
工作噪音 / operating noise at 2200 min-1 nach DIN 45635-48-1 KL3	LpAm 71 dB(A)